



<25 km
Range per Charge



158 kg
Weight Capacity



170 cm
Turning Radius




PATHRIDER® 130 XL

Unstoppable Performance

The Pathrider® 130 XL is designed for those seeking a reliable ride with the power to handle uneven terrain. Equipped with a robust 4-pole motor, this scooter effortlessly navigates both paved paths and rugged surfaces, reaching speeds of up to 10 km/h. The high-back reclining seat and wraparound delta tiller ensure smooth and simple steering, while front and rear suspension provide a stable, comfortable ride over outdoor terrain.



PATHRIDER® 130 XL

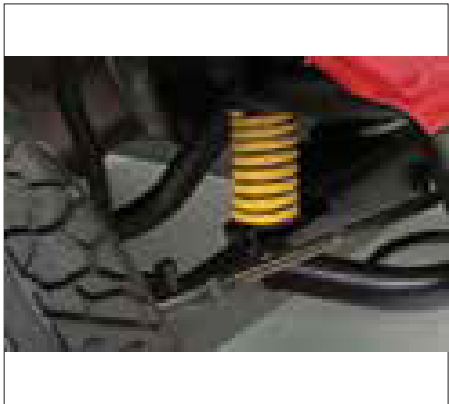

Full Suspension



Easy Drive Tiller



Pneumatic Tyres

RANGE PER CHARGE (MAX) ¹	Up to 25 km
MAXIMUM WEIGHT CAPACITY	158 kg
TURNING RADIUS	170 cm
MAXIMUM SPEED ¹	10 km/h
LENGTH & WIDTH ³	L: 136 cm W: 63.6 cm
SEAT TYPE WIDTH & DEPTH (STANDARD)	Deluxe, pillow-top, high-back seat W: 49.5 cm (19.5") D: 44.5 cm (17.5")
SEAT-TO-DECK HEIGHT	47 cm suspension seat post
SEAT-TO-GROUND HEIGHT	56.7 cm suspension seat post
GROUND CLEARANCE ⁵	9 cm at transaxle

OVERALL WEIGHT (NOT INC BATTERY) ²	99.8 kg
WEIGHT OF HEAVIEST PIECE	34 kg (rear section)
SUSPENSION	front, rear & seat post
3W/4W OPTION	4W
FRONT TYRES	13" pneumatic
REAR TYRES	13" pneumatic
BATTERY REQUIREMENTS ⁴	(2) 55Ah
BATTERY CHARGER	Off-Board, 8A
BATTERY WEIGHT	16.8 kg each
COLOUR OPTIONS	<div style="display: flex; align-items: center;"> <div style="width: 15px; height: 15px; background-color: red; margin-right: 5px;"></div> <div style="width: 15px; height: 15px; background-color: gray; margin-right: 5px; margin-left: 10px;"></div> <div style="margin-left: 10px;"> Candy Apple Red Mercury Silver </div> </div>

1. Varies with user weight, terrain type, battery amp hour (Ah), battery charge, battery condition and tyre condition.
2. Includes standard seat weight.
3. Width of base (not including seat).
4. Deep cycle (AGM or gel cell type recommended)
5. Does not account for anti-tip clearance.

NOTE: All specifications subject to change without notice. The information contained herein is correct at the time of publication; we reserve the right to alter specifications without prior notice. Speed and range vary with user weight, terrain type, battery charge, battery condition and tyre pressure. Due to manufacturing tolerances and continual product improvement, length, width, turning radius and ground clearance can be subject to variance of 3%.